



06-20-00

09582003

12020

PCT
Attorney Docket No.: C36465**ORUM & ROTH**

53 West Jackson Boulevard
Chicago, IL 60604-3606
Telephone: 312-922-6262

PATENTS

09/582003✓

**TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)**

International Application No.: PCT/SE98/02302

529 Rec'd PCT/PTO 19 JUN 2000✓

International Filing Date: December 15, 1998✓

Priority Date Claimed: December 19, 1997✓

Title of Invention: WELDING APPARATUS✓

Applicant(s) for DO/EO/US:

Applicant herewith submits to the United States Designed/Elected Office (DO/EO/US) the following items under 35 U.S.C. 371:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to immediately begin national examination procedures (35 U.S.C. 371(l)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(l).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English.
7. ☐ Amendments to the claims of the International Application under PCT Article 19
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has **NOT** expired.
 - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ has been transmitted by the International Bureau.
 - c. ☒ will follow.
10. ☐ A translation of the Annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).
11. ☒ Copy of the ☒ International Preliminary Examination Report and/or the ☒ International Search Report.
12. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
13. ☒ An Assignment document for recording with a separate cover sheet in compliance with 37 CFR 3.28 and 3.31
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ has been transmitted by the International Bureau.
 - c. ☒ will follow.
14. ☒ A **FIRST** preliminary amendment.
A **SECOND** or **SUBSEQUENT** preliminary amendment.
15. ☐ A substitute specification.
16. ☐ A change of power of attorney and/or address letter.

17. ☐ Verified Small Entity Declaration.
- a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
- b. ☐ has been transmitted by the International Bureau.
- c. ☐ will follow.

09/582003

526 Rec'd PCT/PTO 19 JUN 2000

18. ☐ Other items of information: _____

19. ☐ sheets of drawings are enclosed.

20. ☒ The U.S. National Fee (35 U.S.C. 371(c)(1)) and other fees as follows:


BASIC NATIONAL FEE (37 CFR 1.492 (a)(1)-(5)):			
<input checked="" type="checkbox"/>	Search Report has been prepared by the EPO or JPO = \$840		
<input type="checkbox"/>	International preliminary examination fee paid to USPTO (37 CFR 1.482) = \$700		
<input type="checkbox"/>	No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)) = \$760		
<input type="checkbox"/>	Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO = \$970		
<input type="checkbox"/>	International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4) = \$96		\$840
<input type="checkbox"/>	Surcharge of \$130 for furnishing the oath or declaration later than the <u>20</u> <input checked="" type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).		TOTAL FEE FOR LATE FILING OF OATH/DECLARATION \$
NUMBER OF INDEPENDENT CLAIMS	CLAIMS OVER 3	RATE	TOTAL FEES FOR INDEPENDENT CLAIMS OVER 3
1- 3 =	0 X	\$78=	\$
MULTIPLE DEPENDENT CLAIMS(S) PRESENT	RATE		FEE FOR MULTIPLE DEPENDENT CLAIM(S)
	\$260 PER APPLN.		\$
TOTAL NUMBER OF CLAIMS	CLAIMS OVER 20	RATE	TOTAL FEES FOR CLAIMS OVER 20
14- 20 =	0 X	\$18 =	\$ 0
TOTAL OF ABOVE CALCULATIONS			\$ 840
Reduction by 1/2 for filing by small entity			\$
SUBTOTAL			\$
ASSIGNMENT RECORDAL SHEET			\$
Processing fee of \$130 for furnishing the English translation later than the <u>20</u> <input checked="" type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).			\$ 0
TOTAL FEES ENCLOSED			\$ 840

- a. ☒ A check in the amount of \$ 840 to cover the above fees is enclosed.
- b. ☐ Please charge my Deposit Account No. 04-2219 in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, including request for extension and payment of extension fees due, when this is not explicitly requested by applicants, with a view toward avoidance of abandonment, to Deposit Account No. 04-2219, referencing our docket # C36465. Any over-payment should be credited to this account.

Please direct all communications in connection with this application to the undersigned at:

ORUM & ROTH

53 West Jackson Boulevard
Chicago, Illinois 60604

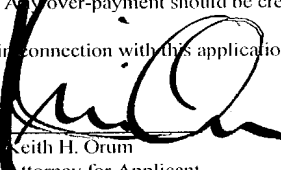
Keith H. Orum
Attorney for Applicant
Registration No. 33985

Andrew D. Babcock
Attorney for Applicant
Registration No. 44517

Susan M. Keating
Attorney for Applicant
Registration No. 41887

George F. Dvorak
Attorney for Applicant
Registration No. 17656

09582003 09/582003

526 Rec'd PCT/PTO 19 JUN 2000

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of)
)
Applicant: ESAB AB)
)
Serial No.: New U.S. Application)
)
PCT Application No.: PCT/SE98/02302)
)
Filed: June 19, 2000)

For: WELDING APPARATUS

Attorney Docket No. C36465

PRELIMINARY AMENDMENT

Hon. Commissioner of
Patents and Trademarks
Box PCT
Washington, D.C. 20231

June 19, 2000

Sir:

Please amend the newly submitted patent application described above as follows:

In the Claims:

Please amend the claims as follows:

New U.S. National Application
Based on: PCT/SE98/02302
June 19, 2000
Page 2

Claim 3, line 1, delete "or 2".

Claim 7, line 1, delete "any one of claims 1-6" and insert "--claim 1--".

Please add the following new claims:

9. An apparatus as claimed in claim 2, characterized in that it also comprises a milling unit (13, 29; 30).
10. An apparatus as claimed in claim 2, wherein the work-table comprises at least one backing (28a, 28b) and each workpiece (2, 3) is clamped to the backing by means of a separate clamping means (21, 22), characterized in that the backing consists of at least two parts (28a, 28b) which are arranged for movement relative to one another and in that at least one workpiece (2, 3) is clamped in the same position between its clamping means (21, 22) and its associated backing part during milling and friction stir welding operations or milling and laser welding operations.
11. An apparatus as claimed in claim 3, wherein the work-table comprises at least one backing (28a, 28b) and each workpiece (2, 3) is clamped to the backing by means of a separate clamping means (21, 22), characterized in that the backing consists of at least two parts (28a, 28b) which are arranged for movement relative to one another and in that at least one workpiece (2, 3) is clamped in the same position between its clamping means (21, 22) and its associated backing part during milling and friction stir welding operations or milling and laser welding operations.
12. An apparatus as claimed in claim 4, wherein the work-table comprises at least one backing (28a, 28b) and each workpiece (2, 3) is clamped to the backing by means of a separate clamping means (21, 22), characterized in that the backing consists of at least two parts (28a, 28b) which are arranged for movement relative to one another and in that at least one workpiece (2, 3) is clamped in the same position between its clamping means (21, 22) and its associated backing part during milling and friction stir welding operations or milling and laser welding operations.
13. An apparatus as claimed in claim 5, wherein the work-table comprises at least one backing (28a, 28b) and each workpiece (2, 3) is clamped to the backing by means of a separate clamping means (21, 22), characterized in

New U.S. National Application
Based on: PCT/SE98/02302
June 19, 2000
Page 3

- that the backing consists of at least two parts (28a, 28b) which are arranged for movement relative to one another and in that at least one workpiece (2, 3) is clamped in the same position between its clamping means (21, 22) and its associated backing part during milling and friction stir welding operations or milling and laser welding operations.
14. An apparatus as claimed in claim 6, wherein the work-table comprises at least one backing (28a, 28b) and each workpiece (2, 3) is clamped to the backing by means of a separate clamping means (21, 22), characterized in that the backing consists of at least two parts (28a, 28b) which are arranged for movement relative to one another and in that at least one workpiece (2, 3) is clamped in the same position between its clamping means (21, 22) and its associated backing part during milling and friction stir welding operations or milling and laser welding operations.

REMARKS

The foregoing amendments are primarily for the purpose of eliminating multiple dependencies, and placing the claims in proper form.

Respectfully submitted,



Keith H. Orum
Attorney for Applicant
Registration Number 33985

Orum & Roth
53 West Jackson Boulevard
Chicago, Illinois 60604-3606
Phone: (312) 922-6262

KHO/ss

09/582003

PCT/SE98/02302

WO 99/32254

526 Rec'd PCT/PTO 19 JUN 2000

1

FILED IN PATENT OFFICE

WELDING APPARATUS

The present invention relates to a welding apparatus comprising a welding unit, a work-table for supporting the workpieces to be welded together, and clamping means for clamping the workpieces to the work-table in the direction towards one another during the welding operation.

The welding method chosen to weld the workpieces together depends among other things on the material of the workpieces. When the workpieces are manufactured from aluminium, aluminium alloys, magnesium, magnesium alloys, zinc, zinc alloys or copper, the friction stir welding method is used to an increasing extent. When on the other hand they are manufactured from steel, or stainless steel, fusion welding in the form of laser welding is used to an increasing extent, particularly in the case of thin workpieces, i.e. having a thickness less than 20 mm.

The definition friction stir welding designates a welding method according to which the workpieces to be joined together are plasticized along their joint line by supply of frictional heat from a rotating welding probe, said probe being supported on a welding head that moves the probe along the joint between the workpieces while at the same time the probe is pressed against the workpieces. As described in WO93/10935 and WO95/26254 the welding probe should be manufactured from a material that is harder than the workpieces, and during the welding operation the workpieces should be securely fixed relative to one another and to the work-table. In this respect this technique differs from that of conventional friction welding according to which the frictional heat is generated by the relative motion of the workpieces as they are being pressed together, i.e. the frictional heat

WO 99/32254

PCT/SE98/02302

2

is generated only by the two components to be joined together. The configuration of the welding probe is conditioned e.g. by the material to be welded and by the intended application.

5 The definition fusion welding as used herein designates a welding method according to which the workpieces to be joined together are fused along their joint line by supply of external energy. Laser welding is a particularly interesting fusion welding technique according to
10 which laser light emitted from a high-energy laser, such as an Nd:YAG laser or a gas laser, causes the fusion. For example welding equipment of the kind described in the article "An introduction to the technology and its applications" in the publication "Sheet Metal Industries"
15 (May 1995) could be used, in which case the laser is mounted on a laser head.

 Friction stir welding is particularly suitable for welding together aluminium profile sections to produce large aluminium panels, for example of the kind intended
20 for ship hulls. The reason therefor is that this method produces a welded joint the bottom face of which has a smooth and even surface finish with resulting few spots of load concentration. In addition, when this joining method is used, the strength of the joint is almost equal
25 to that of the basic material. Owing to the considerable forces acting on the workpieces during the welding proper, the requirements are strict, however, as regards work-table stability and the ability of the clamping means to fix the workpieces.

30 In addition, this welding method can be used only to join together workpieces that are separated by a very narrow air gap. Should the air gap exceed this critical value, a value which among other things depends on the sheet thickness of the profile sections, the resulting
35 welded joint is formed with internal cavities and has impaired strength. As a result, extruded aluminium profile sections, which cannot be produced to exactly

WO 99/32254

PCT/SE98/02302

3

precise dimensions by means of current manufacturing methods, need to be subjected to some preparatory treatment in order to avoid too large gaps between the profile sections. This is particularly important when
5 long profile sections are to be joined together, as in this case also small changes in shape may give rise to unacceptable deviations.

Considering that changes in the profile section shape may occur also during the very friction stir
10 welding operation, because the sections are exposed to heat, the dimensions of the end product may fail to be within the acceptable tolerance range, despite the pre-treatment of the profile sections. Changes in shape are, however, less serious in the case of MIG and TIG welding,
15 since the temperature never reaches the fusing point.

Another consequence of the critical air gap size is that the workpieces must not move relative to one another, once they are fixed in the correct welding position, i.e. the requirements are strict also on the
20 ability of the clamping means to immobilise the workpieces. Since the welding probe must be in contact with both workpieces during the welding, also the requirements on the running accuracy of the welding head are severe.

In laser welding, on the other hand, it is important
25 that throughout the welding the laser welding head assumes a position midway between the workpieces to be joined together. As a result, severe demands are placed on the running accuracy of the laser welding head. Since the laser beam of a laser welding head is very narrow,
30 the joint, i.e. the air gap between the workpieces prior to welding, must have a width in the range of 0 to 0.5 mm. To ensure that the width of the joint does not exceed the above value it may, just like in the case of friction stir welding, be necessary to treat the workpieces before
35 performing the laser welding. To avoid too large gap widths during the welding operation proper it is of course also important that the workpieces are maintained

WO 99/32254

PCT/SE98/02302

4

fixed in the same position throughout the welding, i.e. the clamping means must possess satisfactory immobilising ability. In the case of joint widths outside the above range supplementary material must be added to the joint
5 or else the laser welding head be oscillated backwards and forwards across the joint, necessitating more complex and therefore more expensive laser welding equipment.

To satisfy the above criteria it is necessary, both in the case of friction stir welding and fusion welding,
10 particularly in laser welding, to use complex and consequently expensive welding apparatuses. This is seen to be a serious problem by those industries that wish to be able to produce high-precision welded joints to weld together workpieces manufactured from aluminium or steel,
15 while using the above welding methods without too heavy investment costs.

The object of the present invention thus is to make it possible for these industries to weld together aluminium as well as steel workpieces while using the above
20 welding methods without utilising complex and consequently expensive welding apparatuses.

This object is achieved in accordance with the teachings of the present invention by means of a welding apparatus of the kind defined in the introduction and
25 which is characterised in that its welding unit comprises both a friction stir welding head and a fusion welding head.

Because the apparatus comprises both a friction stir welding head and a fusion welding head the same work-
30 table and clamping means may be used for both welding methods, a feature which obviously reduces the costs considerably compared with the use of two separate welding apparatuses, which is the only existing possibility today. In view of the particularly severe requirements on
35 running accuracy and stability imposed by laser welding, the invention is especially advantageous inasmuch as the

WO 99/32254

PCT/SE98/02302

5

fusion welding is in the form of laser welding, i.e. the fusion welding head is a laser welding head.

The welding apparatus may also comprise a milling unit. Owing to the provision of such a unit it becomes possible to perform milling operations both prior to and/or after each individual welding operation, which ensures that the individual workpieces as well as the resulting product are within the acceptable tolerance ranges without having to be subjected to any external pre- or post-treatments. The milling operation will make the workpieces sufficiently straight to ensure that the air gaps between them will not exceed the value at which deficient welded joints are produced.

The milling unit may be a milling head which is separate from the friction stir welding head. The milling unit could also consist of the friction stir welding head which is equipped with a milling tool. Finally, the milling unit could consist of a milling head which is separate from the friction stir welding head, and of the friction stir welding head which is equipped with a milling tool. In the latter case it thus becomes possible, in one and the same apparatus, to subject the workpiece edges to be joined together to milling prior to the welding proper and to mill the welded resulting joint after the welding, without using any external pre- or post-treatment unit.

The work-table of the welding apparatus may comprise at least one backing to which each one of the workpieces is clamped by means of a separate clamping means. In accordance with this embodiment, the backing consists of at least two parts which are arranged for movement relative to one another. A workpiece may be clamped in the same position between its associated clamping means and its associate backing part during the milling and the friction stir welding operations. Owing to this arrangement, a high-quality friction stir welded joint is produced. In the case of milling and laser welding, on the

WO 99/32254

PCT/SE98/02302

6

other hand, each workpiece could be clamped in the same position between its associated clamping means and its associated backing part. Owing to this arrangement a high-quality laser welded joint is produced.

5 The invention will be described in closer detail in the following with reference to the accompanying drawings, which for exemplifying purposes show different embodiments of a welding apparatus in accordance with the invention and wherein:

10 Fig. 1 is a view from the front of a first embodiment of the welding apparatus.

Fig. 2 is a cross-sectional view of the welding apparatus taken along line II-II of Fig. 1.

15 Figs 3a and 3b are enlarged fragmentary views of the welding apparatus of Fig. 2, showing the welding apparatus in the friction stir welding position and the laser welding position, respectively.

20 Figs 4a and 4c are views corresponding to Figs 3a and 3b but showing a second embodiment of the welding apparatus whereas Fig. 4b is a view of the welding apparatus assuming its milling position.

Fig. 5 is a front view of the welding apparatus in accordance with a third embodiment.

25 The welding apparatus illustrated in Figs 1 and 2 is intended for welding two workpieces 2 and 3 together, such as aluminium profile sections or steel plates, to form an intermediate or final product, such as an aluminium or steel panel. The device comprises a work-table 4, an upper machine frame 5 supported on the work-table, and
30 a welding unit 6. In the subject case the work-table consists of a stationary, stable and horizontal machine table 7 on which a backing 8 is stationarily mounted. The machine frame 5 consists of an outer pair of beams 9a and 9b and an inner pair of beams 10a and 10b, the beams 10a
35 and 10b of the inner pair being connected to the beams 9a and 1b, respectively, of the outer pair by means of bolt connections, not shown, provided at the respective outer

WO 99/32254

PCT/SE98/02302

7

beam ends. The beams 9a and 9b of the outer pair are also interconnected by means of a yoke 11 and rest on the machine table 7 by means of two pillars 12a and 12b each, positioned at the outer ends of the beams.

5 In this embodiment the welding unit 6 consists of a friction stir welding head 13 and a laser welding head 14. As appears from Fig. 1, the two heads are mounted on the same carriage 15 which is disposed on the inner pair of beams 10a and 10b for movement thereon. The carriage
10 15 is displaced along the joint line between the workpieces by means of a drive unit, such as a motor, not shown.

The friction stir welding head 13 is fitted with a guide mechanism, not shown, and, as appears from Figs 3a
15 and 3b, with a welding probe 16 consisting of a frusto-conical body 16a and a pin 16b joined thereto, and during the welding operation, said pin is positioned between the workpieces in contact with the edges thereof to be joined together. The upper part of the probe body is
20 connected to a rotating spindle 17 which is driven by a drive unit, such as a drive motor, not shown. The body and pin of the welding probe could be configured e.g. in conformity with the embodiments illustrated in WO93/10935 or in WO95/26254.

25 The laser welding head 14 is equipped with a laser unit 18, shown in Figs 3b and 4c, and with a joint tracking device, not shown. The laser unit is supplied with laser light from an Nd:YAG laser of the type illustrated in the article "An introduction to the technology and its
30 applications" from the publication "Sheet Metal Industries" (May 1995) and in this embodiment the laser beam source and the laser mirror arrangement are mounted on and inside, respectively, the inner beam 10a.

To ensure that the positions of the welding probe 16
35 and the laser unit 18, respectively, stay the same in relation to the joint-edges of the workpieces along the entire joint, the carriage 15 is connected with the inner

WO 99/32254

PCT/SE98/02302

8

pair of beams 10a and 10b via two guide shoes 19a and 19b, respectively, said shoes travelling along two beam-mounted guide rails 20a and 20b, respectively. This arrangement produces a rectilinear movement relative to the machine frame 5 and the work-table 4.

During welding, the clamping means 21 and 22 press the workpieces 2 and 3, respectively, against the work-table 4 in the direction towards one another. Each clamping means 21 and 22 consists of a triangular pressure member which via arms 23 and 24, respectively, are pressed into engagement with the associated workpiece 2 and 3, respectively, during welding, by means of pressure cylinders 25 and 26, respectively. The pressure cylinders 25 and 26 are connected with the machine frame 5. The clamping means are positioned opposite one another in pairs along the edges of the joint between the workpieces. According to the present embodiment, the distance between the centre lines of two neighbouring pairs is about 500 mm.

As appears from Figs 3a and 3b the backing is formed in accordance with the first embodiment with a groove 27. When the welding apparatus is used for friction stir welding operations, see Fig. 3a, the workpieces 2 and 3 are placed on the backing in such a manner that the joint between them will not be positioned above the groove. This is quite simply due to the fact that in this welding method, the upper face of the backing functions like a mould that shapes the material that is being plasticized, about the joint line. When the welding apparatus is used for laser welding, see Fig. 3b, the workpieces are so placed on the backing that their edges to be joined together will assume a position straight above the groove. This is quite simply due to the fact that otherwise the workpieces would have been welded to the upper face of the backing during the laser welding.

Figs 4a - c, on the other hand, show a two-part backing 28 wherein the upper faces of the parts 28a and

WO 99/32254

PCT/SE98/02302

9

28b, respectively, are plane. In addition, the backing parts are movable relative to one another and according to precisely this embodiment the left-hand part 28b is stationarily mounted on the machine table 7 whereas the
5 right-hand part 28a is movably mounted thereon. In accordance with Fig. 4a, the right-hand part 28a is disposed as close as possible to the left-hand part 28b and in this position only a narrow air gap exists between the parts. In the following, this position will be re-
10 ferred to as the innermost position. According to Fig. 4b, the right-hand backing part assumes a position as far away as possible from the left-hand backing part, and this position will be referred to in the following as the outermost position. In Fig. 4c, finally, the right-hand
15 backing part assumes a position in between the outermost and the innermost positions, and in the following this position will be referred to as the middle position.

When the welding apparatus is to be used for friction stir welding, the joint between the workpieces
20 shall, as pointed out in the foregoing, be placed on a plane and ungrooved face, i.e. the gap between the backings should be as small as possible and consequently the latter assume their innermost position, see Fig. 4a. Since some air gap exists between the backing parts also
25 in this position, the workpiece edges to be joined together additionally must be positioned on the same backing part 28b also during the friction stir welding carried out by means of the welding probe 16.

When, on the other hand, the welding apparatus is to
30 be used for trim milling of the workpieces the friction stir welding probe is replaced in accordance with this embodiment by a milling tool 29 which thus is supported by the friction stir welding head 13. This becomes possible because a friction stir welding head in principle
35 is configured like a milling head and furthermore possesses sufficient motor power and stability to be able to rotate a milling tool instead of a friction stir welding

WO 99/32254

PCT/SE98/02302

10

probe. In order not to damage the upper face of the backing parts, since in the subsequent friction stir welding operation this surface is to serve as a welding-joint mould, the backing parts 28a and 28b should in this case be positioned in their outermost position, see Fig. 4b. In this case the milling tool 29 is placed between the workpiece edges to be joined together.

When the welding apparatus is to be used for laser welding, the joint between the workpieces should, as pointed out previously, be positioned above a medium size air gap, i.e. the backings should assume their middle position, see Fig. 4c. In this case the laser unit 18 is positioned above the workpiece joint line. In view of the fact that satisfactory laser welding in principle always requires subjecting the faces to be welded together to a preparatory treatment of the joint, such as trim milling, the workpieces in principle will always be milled prior to the laser welding. In some cases this is true also in the case of friction stir welding.

As appears from Figs 4b and 4c, the clamping means 21 and 22 and the backing parts 28a and 28b, respectively, assume the same positions relative to the workpiece edges to be joined together during both the milling and the laser welding operations. As workpiece 2 is placed on the movable backing part 28a, this workpiece thus will be moved to the left as seen in the drawing figures in order to position the edges to be welded together in contact with one another after milling. Since the workpiece 2 is held clamped in the same position during both the milling and the laser welding operations, i.e. is not displaced relative to its backing part after the trim milling step, the resulting welding joint possesses the highest possible precision qualities. The synchronisation of the backing part 28a and the clamping means 21 is obtained by mechanical interconnection means or by means of some other type of synchronising mechanism.

WO 99/32254

PCT/SE98/02302

11

Fig. 5, finally, illustrates an embodiment according to which a separate milling head 30 is used, which head is supported by a separate carriage 31 which by means of a drive unit, not shown, may be displaced along the guide rails 20a and 20b of the inner pair of beams in the same manner as carriage 15, see Fig. 7.

When the workpieces 2 and 3 are to be welded together to produce the product to be manufactured, workpieces are clamped in the welding apparatus 1 by means of the clamping means 21 and 22. Depending on the quality of the workpiece edges to be joined together, i.e. on whether they possess an acceptable degree of straightness or not, the workpieces are positioned either in the milling position, see Fig. 4b; or in the welding positions according to Figs 4a and 4c. Should the edges be deficient, the workpieces therefore are clamped in the milling position in which their edges to be joined together abut against the outer face of the milling tool 29, and in this case the friction stir welding probe 16 is replaced by the milling tool. The milling operation is then started by rotation of the milling tool at a predetermined speed while at the same time the tool is moved at a predetermined speed along the edges to be joined together.

When the milling has traversed the entire joint and the individual milling operation thus is completed, the pressure cylinders 25 and 26 are activated, allowing the workpieces to be released from the clamping means 21 and 22, if the workpieces, following the milling operation, are to be welded together by means of the friction stir welding technique. By activation of said pressure cylinders, the workpieces 2 and 3 may thereafter be fixed in the position shown in Fig. 4a. It is likewise possible to fasten the second workpiece already from the start in such a manner that it may assume the same clamped position during both the milling and the friction stir welding operations, i.e. following the milling step only the

WO 99/32254

PCT/SE98/02302

12

left-hand pressure cylinder 26 need be activated for release and subsequent clamping of the left workpiece 3. The milling tool is thereafter exchanged for the friction stir welding probe, which is caused to rotate at a pre-determined speed while at the same time being moved along the gap at a predetermined speed. As explained in the introduction hereto, the workpiece edges to be joined together will be plasticised by the frictional heat generated in this process while at the same time they will be pressed against the work-table. After solidification, a homogeneous welded joint is formed, possessing high-strength qualities. When the friction stir welding probe 16 has traversed the entire joint and the individual welding operation thus is completed, the pressure cylinders 25 and 26 are again activated, causing deactivation of the clamping means 21 and 22, whereby the formed product is released.

If the workpieces are to be welded together by means of the laser welding technique, there is no need to activate the pressure cylinders of the clamping means, when the milling tool has traversed the entire joint and the individual milling operation thus is completed, since both workpieces are clamped in the same position between their associated clamping means and backing parts, respectively, during the milling operation as during the preceding treatment step. The laser unit 18 of the laser welding head 14 is thereafter placed above the joint line of the workpieces, whereupon the laser is activated so as to fuse the joint edges together by supply of laser light. When the laser unit 16 has traversed the entire joint and the individual welding operation thus is completed, the pressure cylinders 25 and 26 are activated, causing deactivation of the clamping means 21 and 22, whereby the formed product is released.

If the desired product is to comprise more than two workpieces it may be necessary to mill between each weld-

WO 99/32254

PCT/SE98/02302

13

ing operation in order to produce a high-quality end product.

It should be appreciated that the invention is not limited to the above embodiments but that numerous modifications are possible within the scope of the appended claims. For example, the welding probe may be exchangeable for the milling tool automatically instead of manually with the aid of a tool switching device. For example, when a separate milling head is used, it is still possible under certain circumstances to exchange the friction stir welding probe 16 of the friction stir welding head 13 for a milling tool, so that milling may be performed prior to as well as after an individual laser welding operation. The separate milling head could of course be positioned upstream from the welding unit as seen in the direction of welding together of the workpieces instead of downstream therefrom, as illustrated in Fig. 5. In the event the welding apparatus 1 is to be used mostly for friction stir welding operations, a separate milling head suitably is used, said head being positioned upstream from the friction stir welding head. Instead of arranging the friction stir welding head and the laser welding head on a common carriage, each head may be arranged on a separate carriage, a feature which increases the versatility of the welding apparatus.

WO 99/32254

PCT/SE98/02302

14

CLAIMS

FILED IN PATENT OFFICE

1. An apparatus (1) for welding, comprising a welding unit (6), a work-table (4) for supporting the workpieces (2, 3) to be welded, and clamping means (21, 22) for clamping the workpieces to the work-table in the direction towards one another during the welding operation, characterised in that the welding unit (6) comprises a friction stir welding head (13) and a fusion welding head (14).

2. An apparatus as claimed in claim 1, characterised in that the fusion welding head is a laser welding head (14).

3. An apparatus as claimed in claim 1 or 2, characterised in that it also comprises a milling unit (13, 29; 30).

4. An apparatus as claimed in claim 4, characterised in that the milling unit consists of a milling head (30) which is separate from the friction stir welding head (13).

5. An apparatus as claimed in claim 3, characterised in that the milling unit is formed by the friction stir welding head (13) fitted with a milling tool (29).

6. An apparatus as claimed in claim 3, characterised in that the milling unit consists of a milling head (30) which is separate from the friction stir welding head (13) and of a friction stir welding head (13) fitted with a milling tool (29).

7. An apparatus as claimed in any one of claims 1-6, wherein the work-table comprises at least one backing (28a, 28b) and each workpiece (2, 3) is clamped to the backing by means of a separate clamping means (21, 22), characterised in that the backing consists of at least two parts (28a, 28b) which are arranged for movement relative to one another and in that at least one workpiece (2, 3) is clamped in the same

WO 99/32254

PCT/SE98/02302

15

position between its clamping means (21, 22) and its associated backing part during milling and friction stir welding operations or milling and laser welding operations.

- 5 8. An apparatus as claimed in claim 7, c h a r a c t e r i s e d in that each workpiece (2, 3) is clamped in the same position between its clamping means (21, 22) and its associated backing part (28a, 28b) during milling and laser welding operations.

10

ABSTRACT

The invention relates to a welding apparatus comprising a welding unit, a work-table for supporting the workpieces to be welded, and the clamping means for clamping the workpieces to the work-table in the direction towards one another during the welding operation. The welding unit comprises a friction stir welding head and a fusion welding head.

1/5

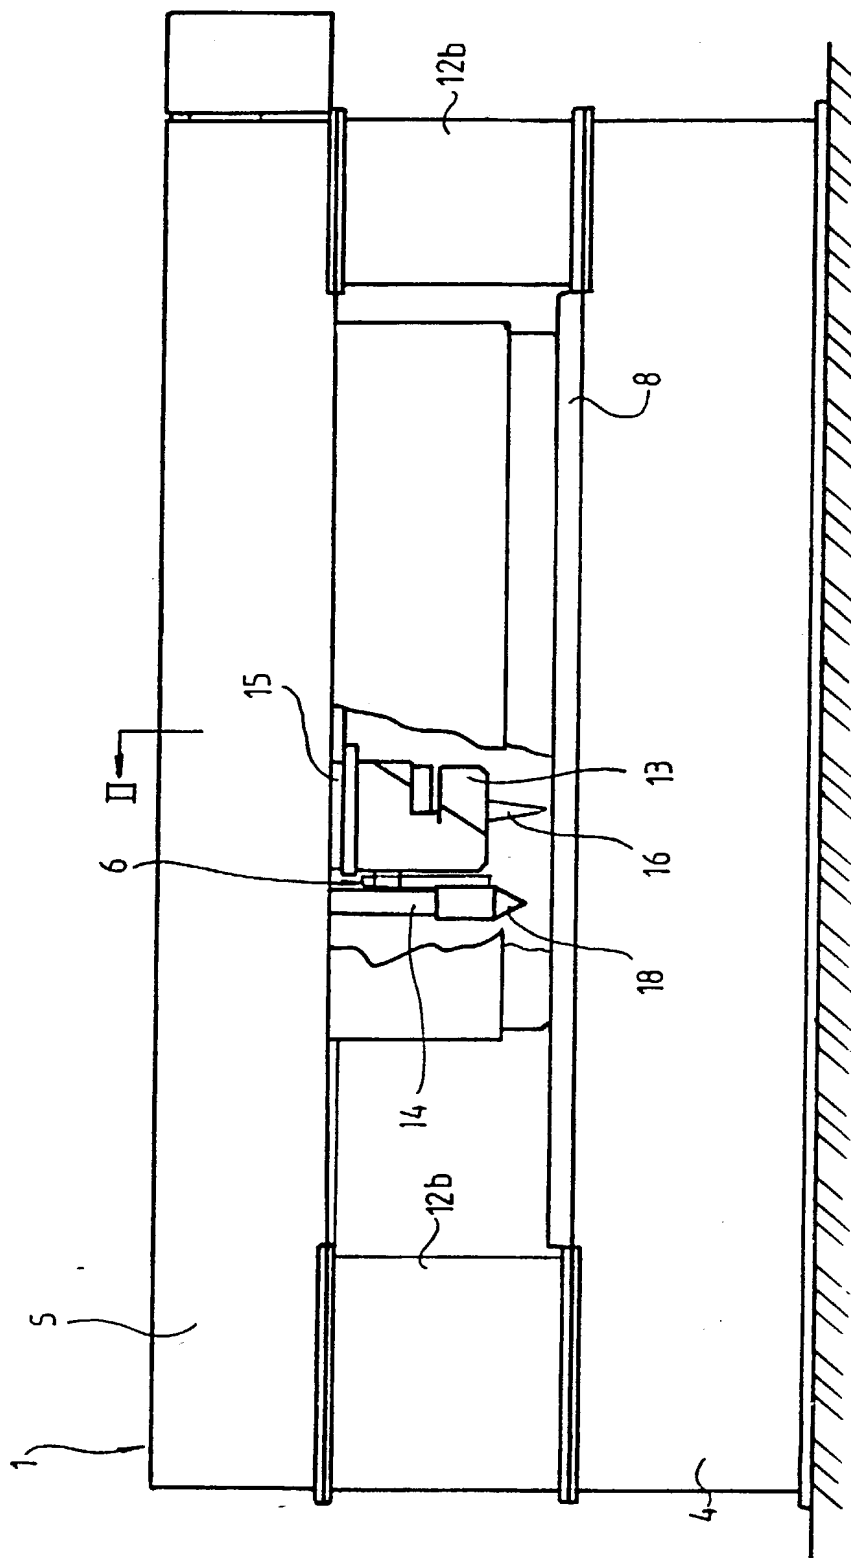


Fig. 1

2/5

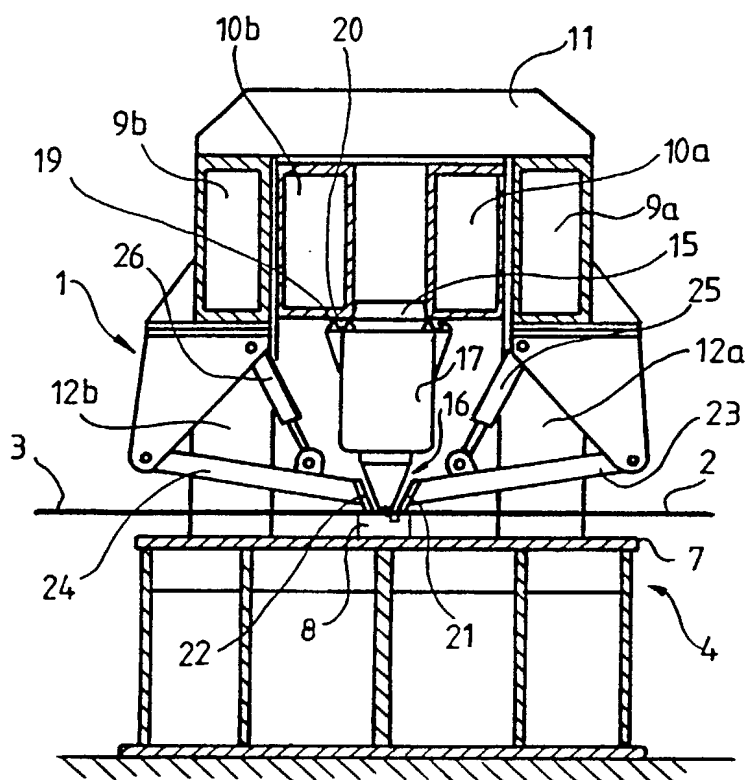


Fig. 2

3/5

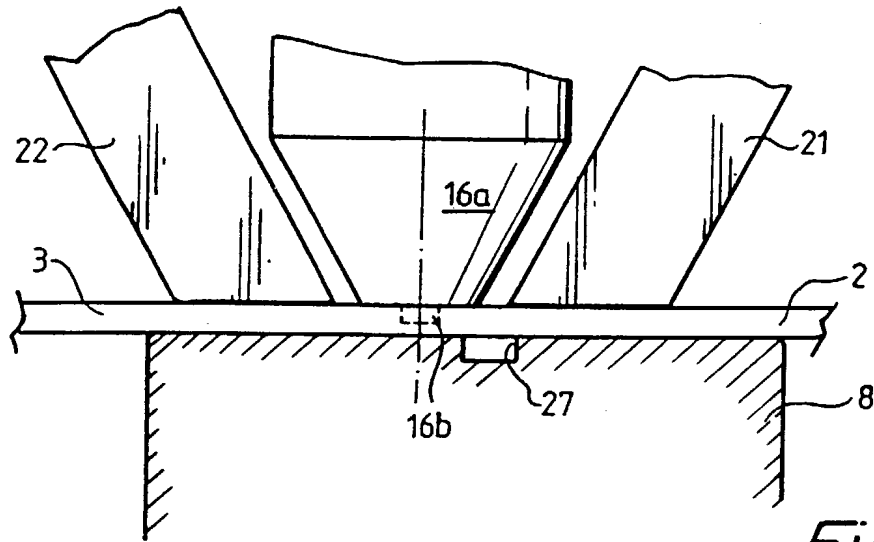


Fig. 3a




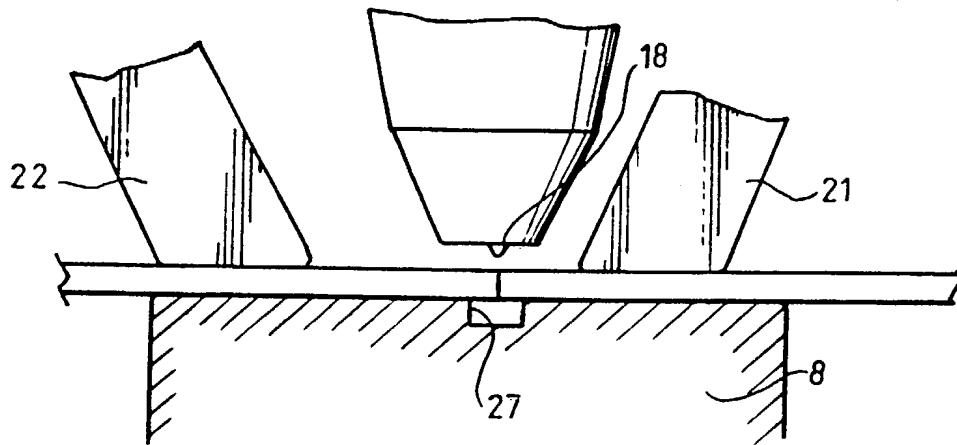


Fig. 3b

4/5

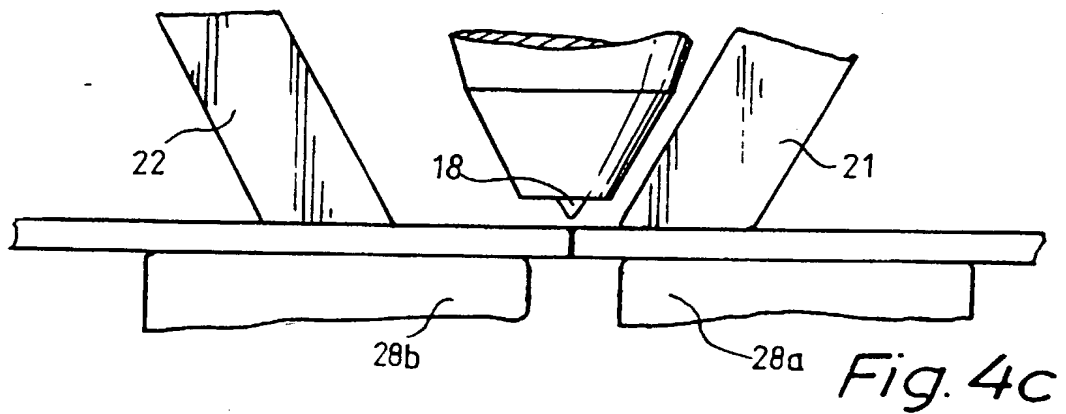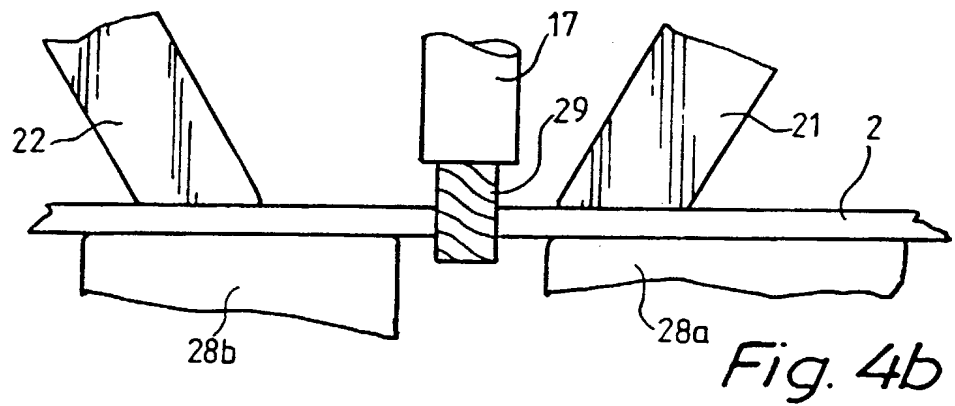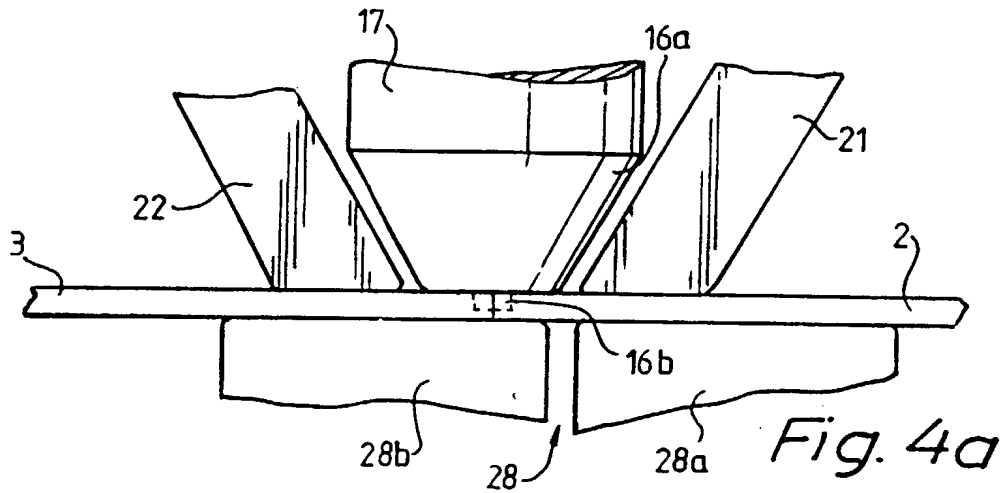

5/5

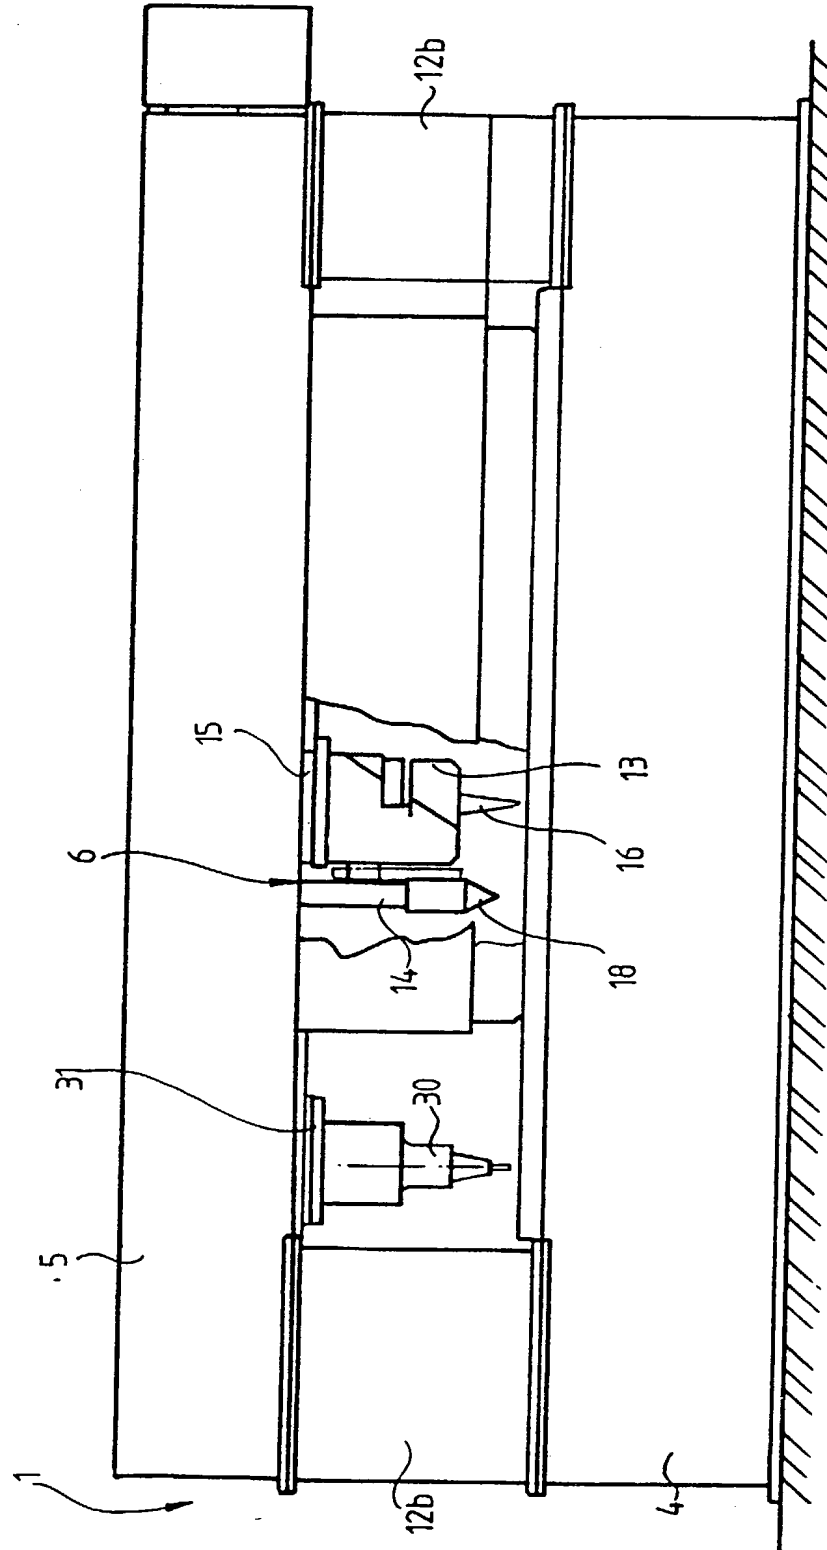


Fig. 5

POWER OF ATTORNEY

UNITED STATES PATENT AND TRADEMARK OFFICE
PATENT/DESIGN

I(We)

Applicant(s):

ESAB AB
P.O. Box 8004
SE-402 77 Göteborg, Sweden

Do hereby authorize the following firm, and its attorneys listed below, to represent me (us) as applicant(s) or proprietors(s) to act for me (us) in proceedings before the United States Patent and Trademark Office concerning the following United States Patent Application(s) or Patent(s) and to receive payments on my (our) behalf:


Applicant(s): ESAB AB
For (title): WELDING APPARATUS
Application Number: 09/582,003
Date Filed: June 19, 2000

This authorization shall also apply to any proceedings under the Patent Cooperation Treaty.

Subauthorization may be given.

I (we) hereby revoke all previous authorization(s) in respect to the above application(s) or patent(s).

Address all telephone calls and correspondence to the below referenced firm.

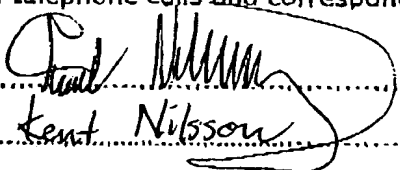Signature: 

Date: November 8, 2002

Name: Kent Nilsson

Title: Patent Manager

Signature:

Name:

Title:

Date:

ORUM & ROTH
53 WEST JACKSON BOULEVARD
CHICAGO, ILLINOIS 60604-3606
USAPHONE: 312.922.6262FAX: 312.922.7747EMAIL: EMAIL@ORUMROTH.COM

09582003 120202

ORUM & ROTH
INTELLECTUAL PROPERTY LAW
COMMERCIAL LAW
LITIGATION

59 WEST JACKSON BOULEVARD
 CHICAGO, ILLINOIS 60604-3606 U.S.A.

**DECLARATION FOR UTILITY OR
 DESIGN
 PATENT APPLICATION
 (37 CFR 1.63)**

☐ Declaration
 Submitted with
 Initial Filing

OR

☒ Declaration
 Submitted after
 Initial Filing
 (surcharge (37
 CFR 1.16 (e))
 required)

Attorney Docket Number: 11412

First Named Inventor: LARSSON, Rolf

Application Number: 09/582,003 ✓

Filing Date: June 19, 2000 ✓

Group Art Unit:

Examiner Name:

As a below named inventor, I hereby declare that:

My residence, mailing address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

WELDING APPARATUS

(Title of the Invention)

the specification of which

☐ is attached hereto

or

☒ was filed on 19/06/2000 as United States Application Number or PCT International
 (DD/MM/YYYY)

Application Number 09/582,003 and was amended on 19/06/2000
 (DD/MM/YYYY)

(If applicable).

I hereby state that I reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56, including for continuation-in-part applications, material information which became available between the filing date of the prior application and the national or PCT international filing date of the continuation-in-part application.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or (f), or 365 (b) of any foreign application(s) for patent, inventor's or plant breeder's rights certificate(s), or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent, inventor's or plant breeder's rights certificate(s), or any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (DD/MM/YYYY)	Priority Not Claimed	Certified Copy Attached? YES NO
97850179.9 ✓	Sweden ✓	19/12/1997 ✓		X
PCT/SE98/02302 ✓	PCT ✓	15/12/1998 ✓		X

Additional foreign application numbers are listed on a supplemental priority date sheet attached hereto:

DECLARATION-----Utility or Design Patent Application

Direct all

correspondence to:

☐Customer Number
or Bar Code Label

OR

☒Correspondence
address belowName: Orum & RothAddress: 53 West Jackson BoulevardCity: ChicagoState: ILZip: 60604Country: U.S.A.Telephone: 312.922.6262Fax: 312.922.7747

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

NAME OF SOLE OR FIRST INVENTOR: ☐ A petition has been filed for this undersigned inventor

Given Name

(first and middle [if any]): Rolf

Inventor's

Signature: Rolf Larsson

Family Name

or Surname: LARSSONDate: 8/11 2002Residence: City: LAXÅ

State:

Country: SwedenCitizenship: SwedishMailing Address: Böverbstigen 14, SE-695 31 LAXÅ, Sweden

City: State: Zip: Country:

NAME OF SECOND INVENTOR: ☐ A petition has been filed for this undersigned inventor

Given Name

(first and middle [if any]):

Family Name

or Surname:

Inventor's

Signature:

Date:

Residence: City: State: Country: Citizenship:

Mailing Address:

City: State: Zip: Country:

☐ Additional inventors are being named on the _____ supplemental Additional Inventor(s) sheet(s) attached hereto.